




TRANSMISSIONS?BEARINGS EUROPE

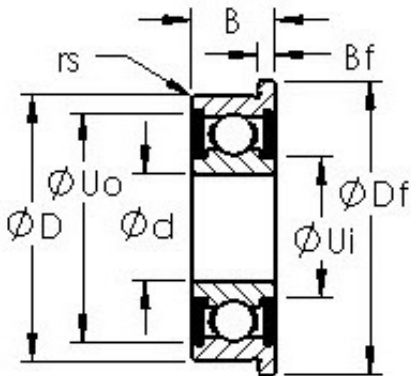

AST SFR2-6-2RS deep groove ball bearings

Bearing No. SFR2-6-2RS

| | |
|--|-----------------------------|
| Bore Diameter | 3,175 mm |
| Outer Diameter | 9,525 mm |
| Width | 3,57124 mm |
| Bearing Type | Flanged Sealed |
| Bore Dia (d) | 0.1250 |
| Outer Dia (D) | 0.3750 |
| Width (B) | 0.1406 |
| Radius (min) (rs) | 0.006 |
| Flange Dia (Df) | 0.4220 |
| Flange Width (Bf) | 0.031 |
| Dynamic Load Rating (Cr) | 122 |
| Static Load Rating (Cor) | 41 |
| Max Speed (Grease) (X1000 RPM) | 53 |
| Max Speed (Oil) (X1000 RPM) | 63 |
| Max. Shaft Shoulder Dia. Inner (Ui) | 0.2 |
| Min. Housing Shoulder Dia., Outer (Uo) | 0.323 |
| Ball Qty | 7 |
| Ball Dia (Dw) | 0.0625 |
| Weight (g) | 1.35 |
| Precision | A1 |
| Standard Clearance | K25 |
| Material | Martensitic Stainless Steel |

SFR2-6-2RS Bearing 2D drawings and 3D CAD models